

Capacitor discharge welding of M4, M5 and M6 studs.

The GYSPOT ALU 66 is dedicated to straightening ALUMINIUM body components.

The station welds studs to eliminate dents and impacts (door panels, hoods, etc.) without stripping.

CHARACTERISTICS

• Microprocessor control

Choice of two modes :

- Voltage (adjustable from 50 V to 200 V).
- Power (adjustable from 0 to 10).

• Capacitor discharge 66 mF

Fast welding (3 millisecond).

• Automatic gun :

- The gun has no trigger; welding is triggered automatically when the tip slides into the gun.
- The earth terminals are integrated to the gun.
- Manual spring force adjustment.



Included :

- Automatic gun with 3 earth terminals included.
- Aluminium dent removal accessory box.
(ALU BOX STANDART M4 050020)
- Chuck for Ø 4 mm studs.


OPTIONAL CART



072169
Dent 1600 WD



051331
Universal 800

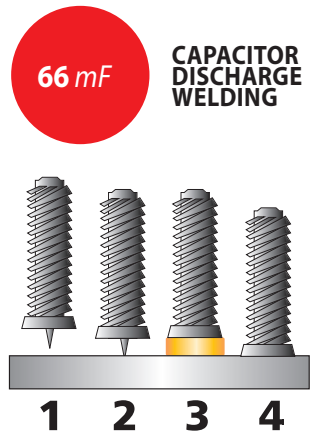

Adjustment of spring force



3 brass **studs** for improved contact and gun stability during welding.

Spring-loaded brass studs adapt to all surfaces.

CE - IEC 62135-1

	I_2 MAX		U_2d		I_{RMS}				
50/60hz		ALU		A	A	OK	OK	kg	cm
185 V - 265 V 1~	13 000 A	AUTOMATIC	50 - 200 V	5	-	OK	OK	14	20.5 x 27 x 37