



CAR BENCH®
CAR BENCH INTERNATIONAL SPA

ONLY THE BEST CAN BE NUMBER ONE

TRITON






**THE
TRITON
QUICK PULL BENCH
IS A BENCH MOUNTED
ON A DOUBLE-EFFECT
ELECTRO-HYDRAULIC
SCISSOR LIFT.**

It can be installed within the floor, or placed on the lift plate and can also mount four wheels that make it perfectly mobile.

It is suitable for any type of spot repair of cars and small commercial vehicles.

Equipped with an easy and fast pulling system (with 10 Tons pulling capacity), applicable at any point of the frame, with vertical and horizontal rotation $\pm 90^\circ$.



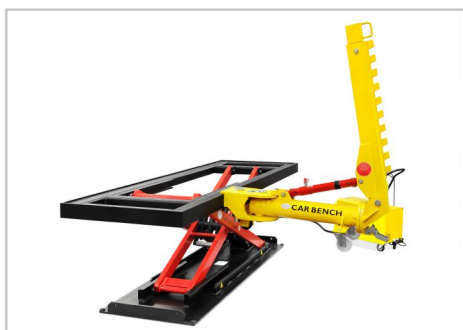


EXCELLENT AS A LIFT FOR DISASSEMBLY AND REASSEMBLY.

The **anchoring** of the car can be done with the provided universal sill clamps in a **practical and fast way**.

In addition, a package is also provided for the 'Triton' model which offers the possibility of mounting - in a reduced version - the **universal Jig**.

Among the **optional accessories** you can find the Contact Evolution electronic measuring system, some special sill clamps, the downward pulling system, the wheels and a cover for floor installation.

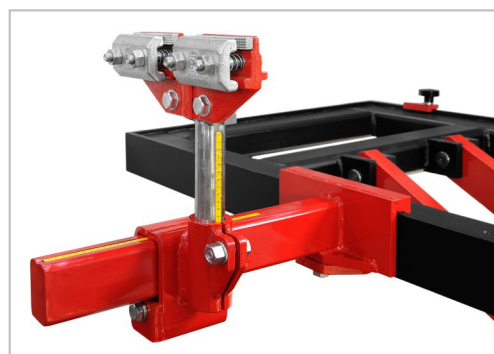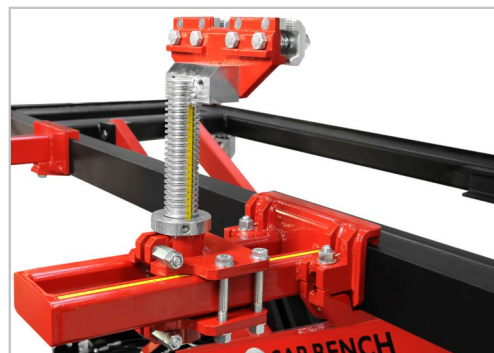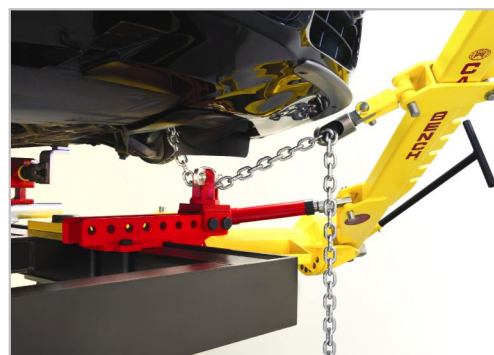

**TRITON
PULL POST**

CAR BENCH

CAR BENCH

TRITON

CAR BENCH


TRITON

TRITON



TECHNICAL FEATURES

Frame Length	3 m (9' 8")
Frame Width	880 mm
Max. lifting height from working area	1.840 mm (6')
Minimum Height	115 mm (0,38')
Load Capacity	3.000 Kg (6,614 lb)
Lift Weight	0.87 t
Nominal Power	2kW
Nominal Voltage	380V
Nominal Current	4,3 A
Nominal Frequency	50 Hz
Max pressure when lifting	320 Bar
Weight of electrohydraulic control unit	60 Kg
Control unit tank capacity	5 L
Pull post	10 ton

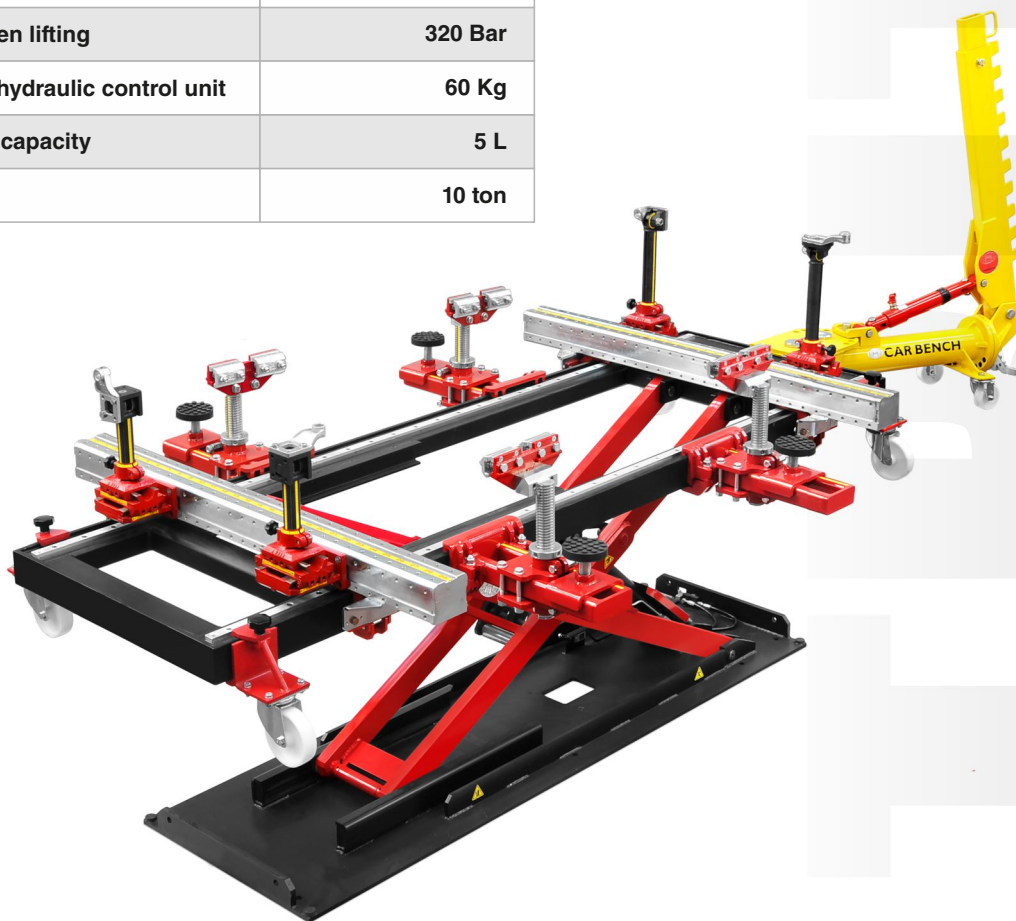

CAR BENCH
TRAINING ACADEMY

REPAIR
METHODS

CAR BENCH
EQUIPMENT TRAINING

CUSTOMIZED
OEM TRAININGS



Car Bench International S.p.A.

Via Dorsale, 22 - 54100 Massa (MS) - ITALY

info@carbench.it - ph. +39 0585 251261

www.carbenchinternational.com